




LED DLX Floodlight Class II



Visit our website
for more information:
www.boselektro.com

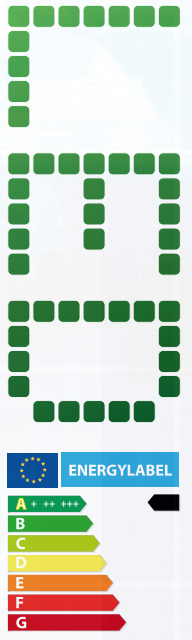

Primaelux DLX LED fittings Class II.

The fittings have a modern design. They are ideal as lighting in the construction sector, industry, shipyards and for advertising. These fittings are also highly suitable for illuminating buildings and as guidance lighting for sites. The fixture housings are made of high pressure die-cast aluminium with powder coating, and have polished, anodised reflectors. All of our light fittings have safety glass.

DLX LED fittings produce an ultra-high light output with exceptionally low energy consumption.

- Class II suitable for within and beyond arm's reach
- Sustainable lighting, green label certification
- In compliance with EN 60598
- Light colour 6500 K (daylight)

The class 2 fittings come as standard with 5 metres of H07RN-F (neoprene) 2 x 1 qmm. with a rubber-moulded plug and a deluxe tilting stand. The fittings are supplied in a full-colour pack in 4 languages with instructions enclosed.

- 30W LED fitting incl. cable and deluxe tilting stand
Article number: LEDL 030230110
- 50W LED fitting incl. cable and deluxe tilting stand
Article number: LEDL 050230110
- 70W LED fitting incl. cable and deluxe tilting stand
Article number: LEDL 070230110
- 100W LED fitting incl. cable and deluxe tilting stand
Article number: LEDL 100230110

Lots of light. Little energy.

