




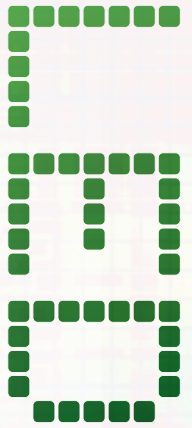

LED Floodlight

Class II

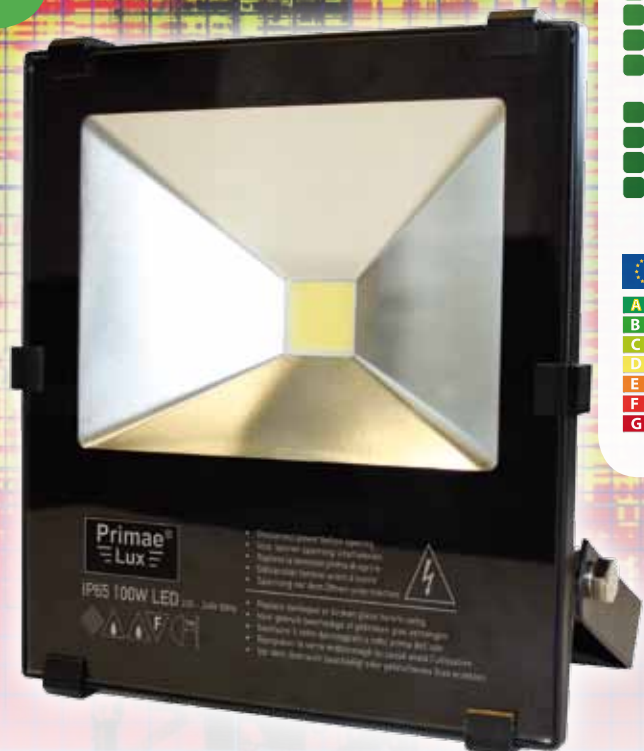

Visit our website
for more information:
www.boselektro.com




Primaelux type S LED fittings Class II.

The fittings have a compact design. They are ideal as lighting in the construction sector, industry, shipyards and for advertising. These fittings are also highly suitable for illuminating buildings and as guidance lighting for sites. The fixture housings are made of high pressure die-cast aluminium with powder coating, and have polished, anodised reflectors. All of our light fittings have safety glass.

The LED fittings produce an ultra-high light output with exceptionally low energy consumption.

- Class II suitable for within and beyond arm's reach
- Sustainable lighting, green label certification
- In compliance with EN 60598
- Light colour 6000 K (daylight)

The class 2 fittings come as standard with 5 metres of H07RN-F (neoprene) 2 x 1 qmm. with a rubber-moulded plug. The fittings are supplied in a full-colour pack in 4 languages with instructions enclosed.

- 30W LED fitting incl. cable
Article number: LEDS 030220101
- 50W LED fitting incl. cable
Article number: LEDS 050220101
- 100W LED fitting incl. cable
Article number: LEDS 100220101

Lots of light. Little energy.

